


REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	3/27/12	KL	

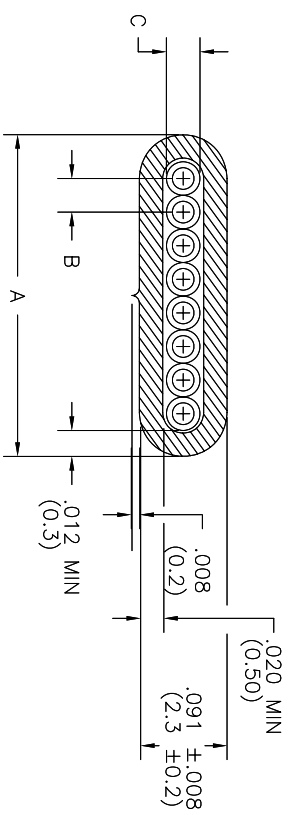

NO. OF CONDUCTORS	ITEM NO.	DIMENSION			INFORM
		A	B	C	
4	#1017-4C-26SS	.189 (4.8)	.035 (0.9)	±.002(0.04)	BLK, RED, GRN, YEL
6	#1017-6C-26SS	.264 (6.7)	.035 (0.9)	.035 (0.9)	WHT, BLK, RED, GRN, YEL, BLU
8	#1017-8C-26SS	.343 (8.7)	.035 (0.9)	.035 (0.9)	GRY, ORN, BLK, RED, GRN, YEL, BLU, BRN

PHYSICAL CHARACTERISTICS:

- CONDUCTOR
COPPER WIRE: 26AWG 7 STRAND
INSULATION: POLYPROPYLENE
- JACKET
INSULATION: PVC
- COLOR
SS: SILVER SATIN, BK: BLACK

ELECTRICAL:
CONDUCTOR RESISTANCE: 150 Ohms/KM Max.
INSULATION RESISTANCE: 100 MegOhms Minimum
DIELECTRATED VOLTAGE: 150 Volts

TOLERANCE: ±0.3MM UNIT: mm

CONFIDENTIAL

© Copyright 2012 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.



BULK LINE CORDS
26 AWG

DRAWN: KIM	DATE: 3/27/12	TITLE: BULK LINE CORDS	SIZE: B	DRAWING NO: R1017-26AWG	REV: A
CHECKED:	DATE:	ENGINEER:	DATE:	SCALE: NONE	SHEET 1 of 1
APPROVED:	DATE:	APPROVED:	DATE:		