

5

4

3





2

1

DWG NO. R153-6-S

RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	10/28/08	KL	

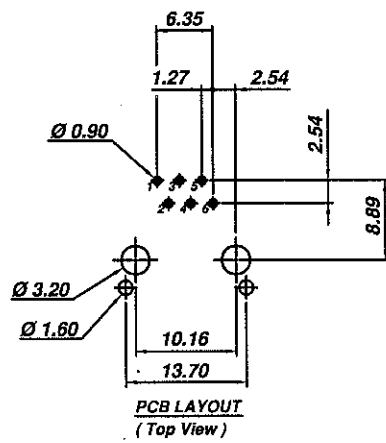

SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

Tolerance: .xx ±0.25
.xxx ±0.13 UNIT: mm

CONFIDENTIAL



© Copyright 2008 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 10/28/08	TITLE:
CHECKED:	DATE:	MODULAR JACK w/SHIELDED
ENGINEER:	DATE:	
APPROVED:	DATE:	SIZE: B
APPROVED:	DATE:	DRAWING NO. R153-6-S
APPROVED:	DATE:	REV: A
SCALE: NONE		SHEET 1 OF 1

5

4

3

2

1