
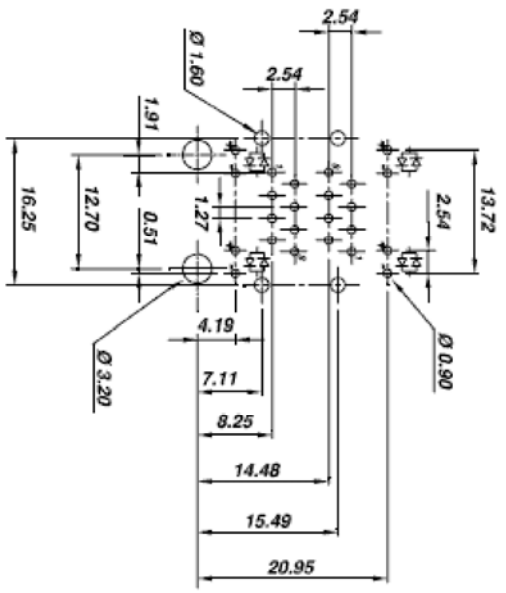
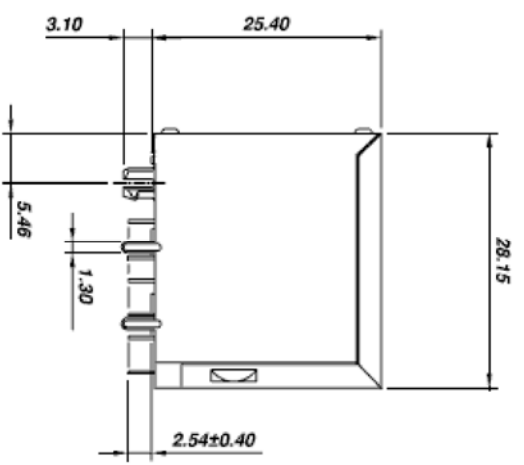


ROHS COMPLIANT

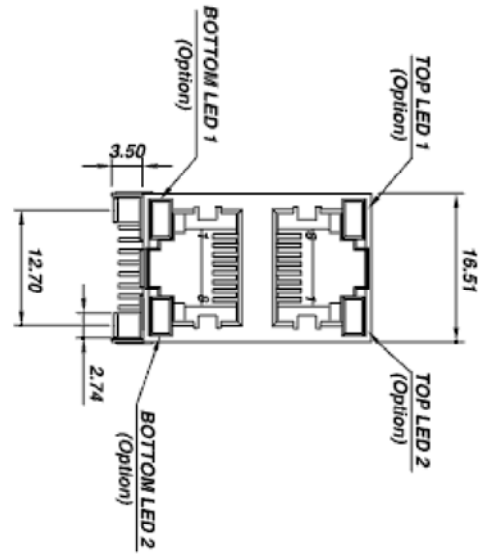

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
 Contact Resistance : 30milli-Ohm Max.
 Rating Current : 1.5A Max.
 Rating Voltage : 150V AC.
 Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

2. Physical char.

Housing (Option) : For Waving Soldering Process
 PBT Glass Filled (UL 94V-0), Soldering Temperature: 245°C for 5 Sec.
 Color : Black Color
 Spring Wire :
 0.35mm Thickness Phosphor bronze sw Gold Plating Over Nickel
 Shielded : Brass Plating Nickel
 Temperature Range : -40°C / +85°C
 Durability : 750 Mating cycles Min.

CONFIDENTIAL

© Copyright 2016 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

LED Designation :

Code	Forward	Reverse	Code	Forward	Reverse
G	Green		4	Yellow	Red
Y	Yellow		5	Green	Yellow
R	Red		6	Yellow	Green
O	Orange		9	Red	Green
3	Green	Red	0	Red	Yellow

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	12/13/16	KL	



DRAWN:	DATE:	TITLE:
KIM	12/13/16	DUAL RJ45 SIDE ENTRY LED JACK
CHECKED:	DATE	
ENGINEER:	DATE	
APPROVED:	DATE	
APPROVED:	DATE	
APPROVED:	DATE	

SCALE:	DRAWING NO.	REV
NONE	R165STR-88-1	A

Tolerance	±0.25
.xxx	±0.13
ang.	±1°

UNIT: mm

PC Layout (Top View)

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A

5 4 3 2 1

D C B A