
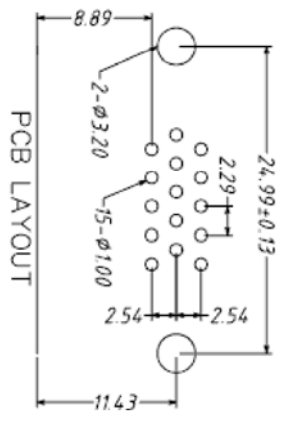
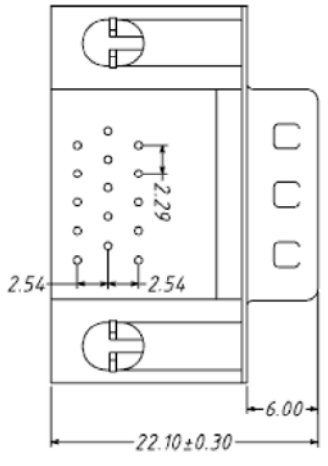



ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	11/28/06	KL	

DWG NO. R4027-15H

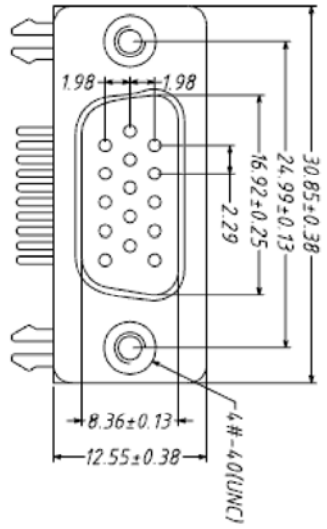

Tolerance	±0.2
.xx	±0.05
.xxx	±2°
ang.	

UNIT: mm

SPECIFICATIONS:
ELECTRICAL SPECIFICATION
 Contact Current Rating: 3 Amperes
 Dielectric Withstanding Voltage:
 AC 1000/60ses.r.m.s.
 Insulation Resistance:
 5000 Megohms MINIMUM at DC 500V
 Contact Resistance: 25 Milliohms Maximum
 Operating Temperature: -55°C to +105°C
MECHANICAL CHARACTERISTICS:
 Contact Insertion Force: 300gfMax
 Contact Separation Force: 25gf Min
MATERIALS:
 Contacts: Brass
 Insulator: PBT+30%(UL94V-0)
 Shell: Steel

CONFIDENTIAL



© Copyright 2016 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 11/28/06	TITLE: D-SUB 15P CONNECTOR
CHECKED:	DATE:	
ENGINEER:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
SCALE: NONE	DRAWING NO. B R4027-15H	REV A
		SHEET 1 of 1