



REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	6/29/06	KL	WEK

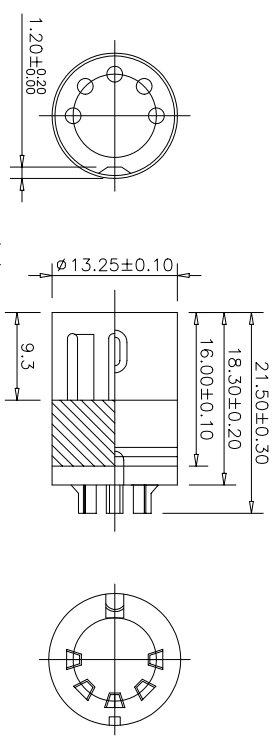

DIN SOLDER TYPE(M)	
NO.OF CONTACT	3(180°)
PART NO.	DIN-3P
POSITION	

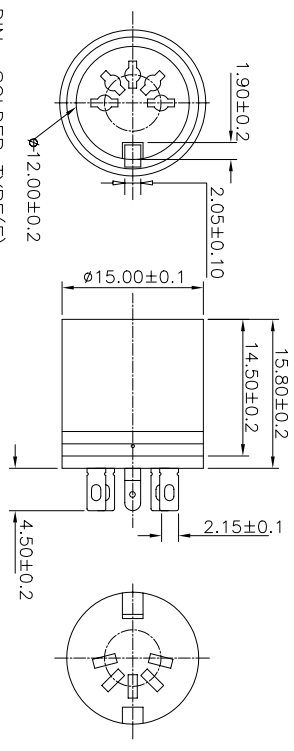

DIN SOLDER TYPE(F)	
NO.OF CONTACT	3(180°)
PART NO.	DIN-3S
POSITION	

- Note:
- Material:
 - Insulator: P.B.T UL 94-V0 rated.
 - Contact: Copper alloy,t=0.60mm.
 - Shell: Copper alloy,t=0.40mm.
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
 - Contact resistance: 30 mW Max.
 - Insulation resistance: 1000 MW Min at DC 500V.
 - Total mating force: 3.0 Kgf Max.
 - Total unmating force: 0.5 Kgf Min.
 - Temperature range: -55C~+105C

Tolerances unless otherwise specified	holes ±0.10 X. - ±0.38 .X - ±0.25 .xx - ±0.13
---------------------------------------	--

CONFIDENTIAL

© Copyright 2006 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 6/29/06	TITLE: DIN CONNECTOR SOLDER TYPE
CHECKED:	DATE:	SIZE: B
ENGINEER:	DATE:	DRAWING NO: R4130-series
APPROVED:	DATE:	SCALE: NONE
APPROVED:	DATE:	SHEET 1 of 1
REV: A		

