


ROHS COMPLIANT

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	10/3/07	KL	
B	DATA UPDATED PER ECO 002	1/10/14	KL	

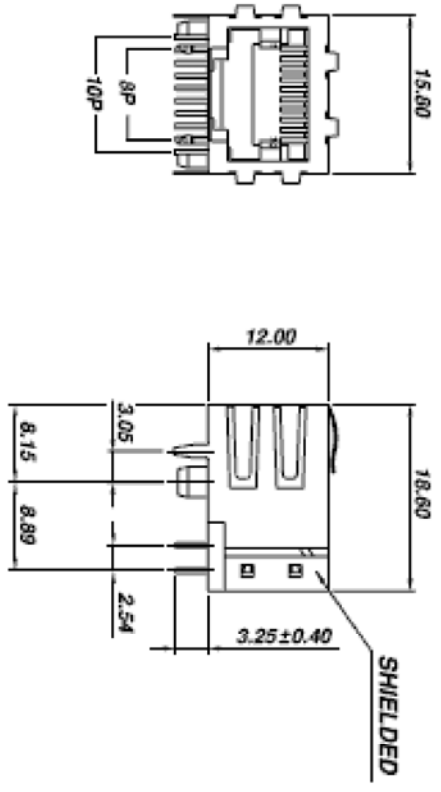


**SPECIFICATION :**

**1. Electrical Char.**

- Insulation Resistance : 500M-Ohm Min. 500V DC. for 1 minute.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms at 1MA 60 Sec. Min.

**2. Physical char.**

- Housing : PBT Glass Filled (UL 94V-0), Soldering Temperature: 235°C for 5 Sec.
- Color : Black Color
- Spring Wire : 0.45mm Dia Phosphor Bronze Gold Plating Over Nickel
- Shielded : Brass Plating Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

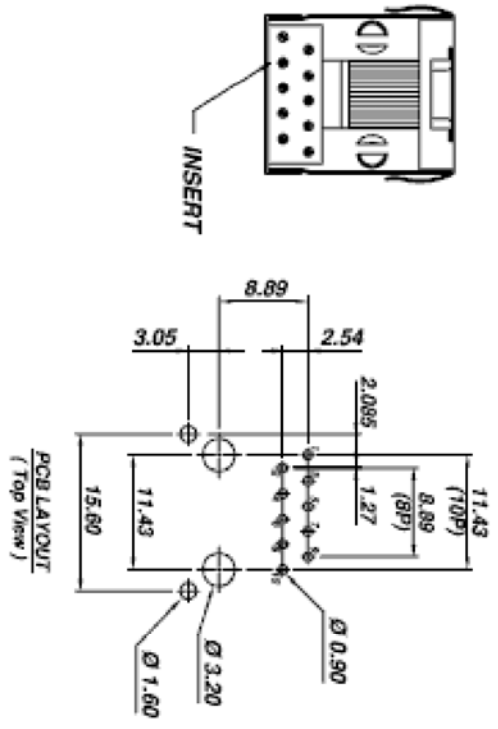

Tolerance	.xx	±0.25
	.xxx	±0.13
	ang.	±1°

UNIT: mm

CONFIDENTIAL



LOW PROFILE  
PCB JACK

© Copyright 2014 Regal Electronics, Inc.  
This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN: KIM	DATE: 10/3/07	TITLE: LOW PROFILE PCB JACK
CHECKED:	DATE:	
ENGINEER:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
APPROVED:	DATE:	
SIZE: B	DRAWING NO: R951-8-PTRAS	REV: B
SCALE: NONE		
	SHEET 1	OF 1