


RoHS Compliant

REV	ECO NO.	DATE	BY	APP'D
A	REL TO PRODUCTION PER ECO 001	8/9/19	KL	

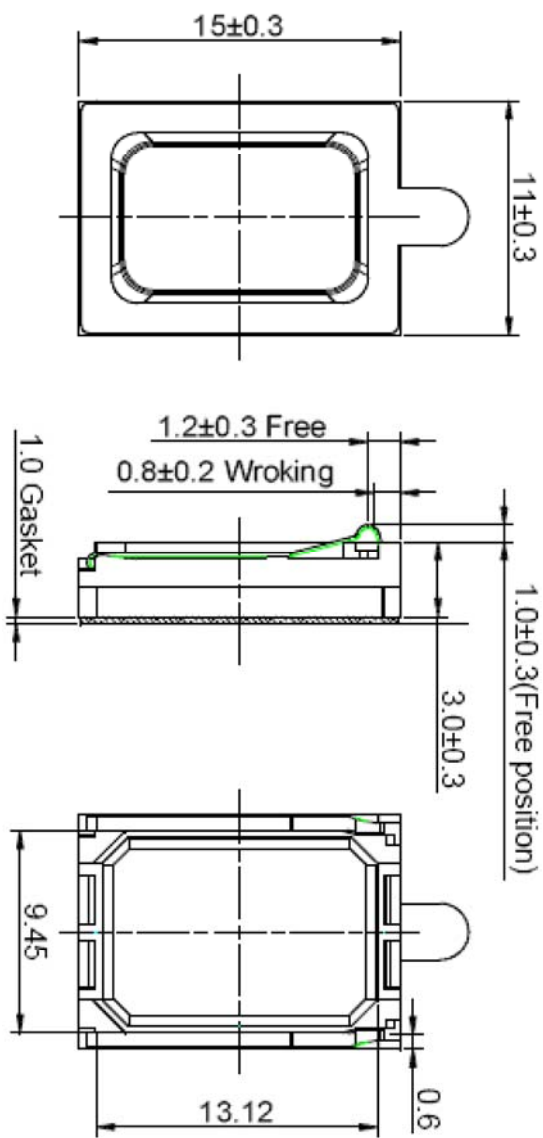

SPECIFICATIONS:

Rated Impedance: 8 Ohms $\pm 15\%$
 Rated Power: 0.5W Max. 0.8W
 Resonant Frequency: 800 $\pm 20\%$
 Effective Freq. Range: fo - 12KHz
 SPL (at 0.1w, 0.1m) 82 ± 3 dB
 Operating Temp.: -20°C ~ +60°C

mylar cone
 Front side rating: IP67 (dust tight / waterproof)
 Requires mounting in IP67 rated enclosures

Tolerance: ± 0.3 mm

UNIT: mm

CONFIDENTIAL



HIGH POWER
 MICRO SPEAKER

© Copyright 2019 Regal Electronics, Inc.
 This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

DRAWN:	KIM	DATE	8/9/19
CHECKED:		DATE	
ENGINEER:		DATE	
APPROVED:		DATE	
APPROVED:		DATE	
APPROVED:		DATE	

TITLE:	HIGH POWER MICRO SPEAKER		
SIZE:	B	DRAWING NO.	RHO-1511SP-NL67
SCALE:	NONE	SHEET	1 of 1
REV:	A		